



white
edition




black
edition



Featuring a futuristic design, this UPS was specifically designed for Mac users. With its energy saving technology and high performances (1000VA), **iPack** reaches over 20 minutes runtime. Its innovative design with modern shape, extremely compact size and neat contemporary lines will make **iPack** a trend-maker. Perfectly integrated into the UPS are three outlets and USB interface.

Ideal for Mac Pro line. **iPack** does not require software installation: it is supported and automatically recognized, installed and managed by Mac OS X.

For advanced users, the brand new UPSEye for Mac OS X supports **iPack** advanced features, thus assuring a full integration with Mac OS X for perfect and complete management and shutdown scheduling.

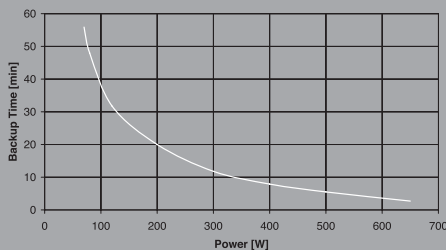

Note:

* The above table shows the battery runtime, depending on the load (measured in Watts). The battery runtime is indicative with new and fully charged batteries.



Tel. +39 0432 671758 - Fax. +39 0432 671760
info@idowell.eu - www.idowell.eu

Technical data

Model	iPack
Power	1000 VA (600 W)
Dimensions (H x W x D)	235 x 165 x 165 mm
Shipping Dimensions (H x W x D)	365 x 240 x 225 mm
Net Weight	10,4 Kg
Shipping Weight	11,3 Kg
Operating Temperature	0 ÷ 40 °C
Storage Temperature	-20 ÷ 50 °C
Operating Relative Humidity	0 ÷ 90% (Non Condensing)
Noise @ 1mt.	25 dBA
Input	
Voltage	200 ÷ 230 Vac
Frequency	50 Hz
Input Connections	(x1) IEC320
Output	
Voltage (mains mode)	230 Vac ± 10% AVR (Automatic Voltage Regulation)
Voltage (battery mode)	230 Vac ± 8%
Frequency	50 Hz (PLL)
Output Format	Stabilized Sine Wave (Full Bridge Inverter)
Output Connections	(x3) IEC320
Intervention Time (Typical)	5 ms
Efficiency	>98%
Batteries and Backup Time	
Battery Type (Q.ty)	(x2) Maintenance-free Sealed Lead-Acid 12V - 5Ah
Typical Recharge Time	8 h
Backup Time (Mac Pro 2 x 2.66 GHz Dual Core Intel Xeon + Cinema HD Display 23")*	20 min
Battery Charger	"LONG BATTERY LIFE" System
Controls and Communication	
Front Panel	1 Led (Power On / Battery), 1 Button and Buzzer
Audible Alarms	On Battery, Low Battery, Overload
Interface Port	USB
Software	No Software Required: UPS Supported by OS
Conformance	
Reference norms	CE (EN62040-1-1; EN60950-1; EN50091-2)
Warranty	2 Years (Battery + Electronic)
Equipment Protection Policy	Lifetime